






OT-502 Output tray

INSTALLATION MANUAL

Applied Machines: C6501/C6501P/C5501/C6500/C6500P/C5500/C65hc/C7000/C7000P/C6000/C70hc
 COLOR MFP: 65ppm/55ppm COLOR PRESS: (71ppm/71ppm)/(70ppm/70ppm)/(60ppm/60ppm)
 Product code: A0U0/A0U1/A0U2/A03U/A03V/A0E7/A0Y8/A1DU/A204/A1DV/A205

I. Accessory parts


No.	Name	Shape	Q'ty
1.	Paper exit unit	 A049IXC001SA	1
2.	Paper exit unit cover	 A049IXC002SA	1
3.	Output tray	 A049IXCUU3SA	1
4.	Bind screw M3x6		6
5.	Installation manual		1

Note:

Take the same procedures, though the machine photographs are different from the ones illustrated in the procedures.

II. Installation procedures


1. Remove the left cover of the machine (11 screws).

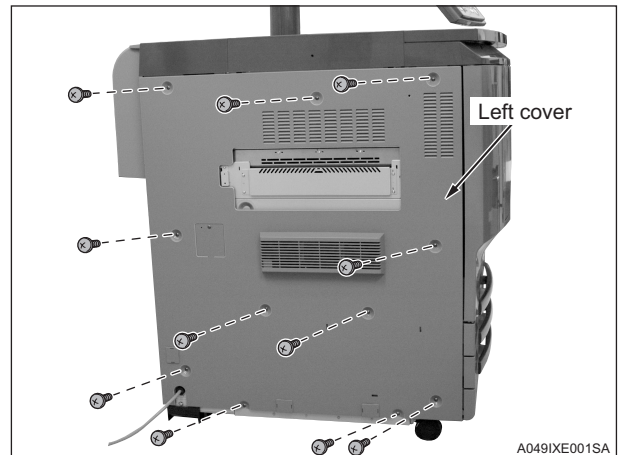

2. Remove the cover 1 (1 screw) and cover 2 (4 screws) from the left side of the machine.

Note:


Keep cover 1 and cover 2 in a safe place because they will be necessary when installing other options.

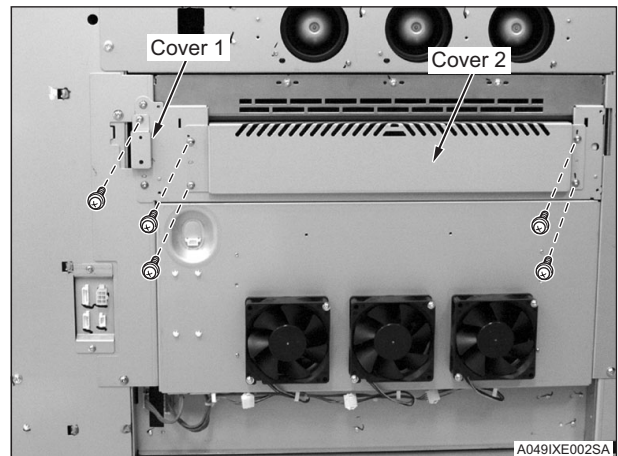


3. Install the paper exit unit. (Screws of cover 2 removed in step 2: 4 pcs.)

Note:


Check the connections of the gears before tightening the screws.

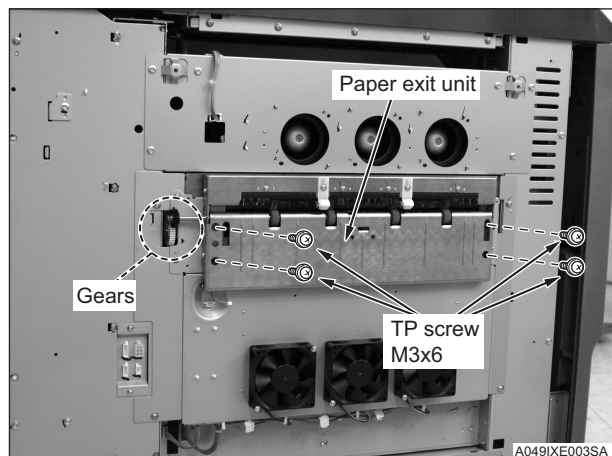

4. Connect the paper exit unit connector to the machine connector.

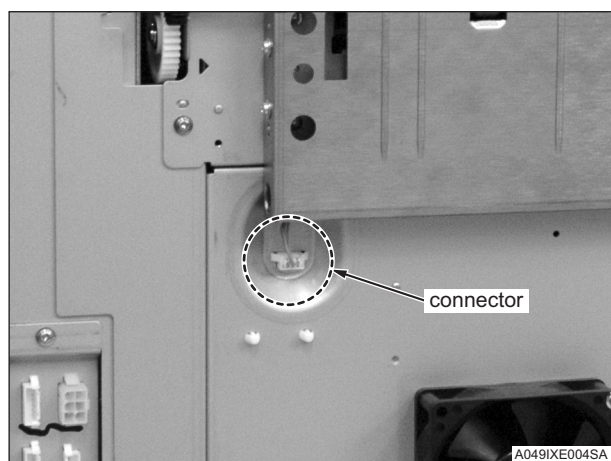

5. Install the paper exit unit cover. (Bind screw M3x6: 6pcs.)

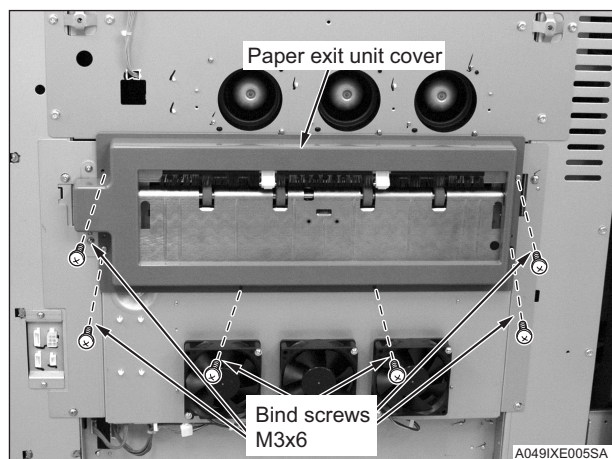

6. Install the left cover of the machine. (11 screws)

7. Install the Output tray.

